


DATA SHEET ~ TECO MAXe3™ PREMIUM SEVERE DUTY - MEPS HIGH EFFICIENCY	
Type	Squirrel Cage Induction Motor ~ TEFC
Input Supply	415Volts 50Hz 3 Phase
Degree of Protection	IP66 Complete with Porous Drain Plugs
Mounting Arrangments	IM1001 B3 / IM3001 B5 / IM2001 B35
Cooling Class	IC411
Insulation	Class 'F' 155°C
Temperature Rise	≤80°C
Ambient Condition	40°C (TECO can accept up to 55°C ambient as standard)
Altitude	Less than 1000 Metres above sea level
Application	Vee Belt Drive or Direct Coupled
Starting Method	DOL, Soft Starter or VVVF Duty (Subject to load demand)
Service Factor	1.0 p.u @ Class B Temp. rise - 1.15 p.u @ Class F Temp. rise
Rotation	Bi Directional - Low Noise
Bearing Type & Arrangement	Oversize Series Anti Fiction - Ball / Roller Arrangement
Terminal Box Type & Rating	Oversized Cast Iron Construction - IP66 rating
kW Rating	110
Pole	4
Full Load Speed (Rpm)	1482
Frame Size	280MC
Efficiency @ 100% Loading	96.4
Efficiency @ 75% Loading	96.3
Efficiency @ 50% Loading	95.9
Power Factor @ 100% Loading	87.5
Power Factor @ 75% Loading	84.0
Power Factor @ 50% Loading	77.5
Full Load Current (Amps)	181.00
Starting Current in % (DOL)	746
Starting Current (Amps) (DOL)	1350.3
Full Load Torque (Nm)	709.00
Locked Rotor Torque (DOL) (% of Full Load Torque)	154
Pull Up Torque (DOL) (% of Full Load Torque)	121
Breakdown Torque (% of Full Load Torque)	253
Rotor Inertia in $GD^2/4$ (kG-m ²)	2.1500
Maximum Inertia in $GD^2/4$ (kG-m ²)	39.0000
Noise Pressure Level @ 1 Metre No Load (dBA)	75
Approx. Weight (kG)	880

DOL Torque versus Speed & Current Curve



Efficiency & Power Factor Load Curve

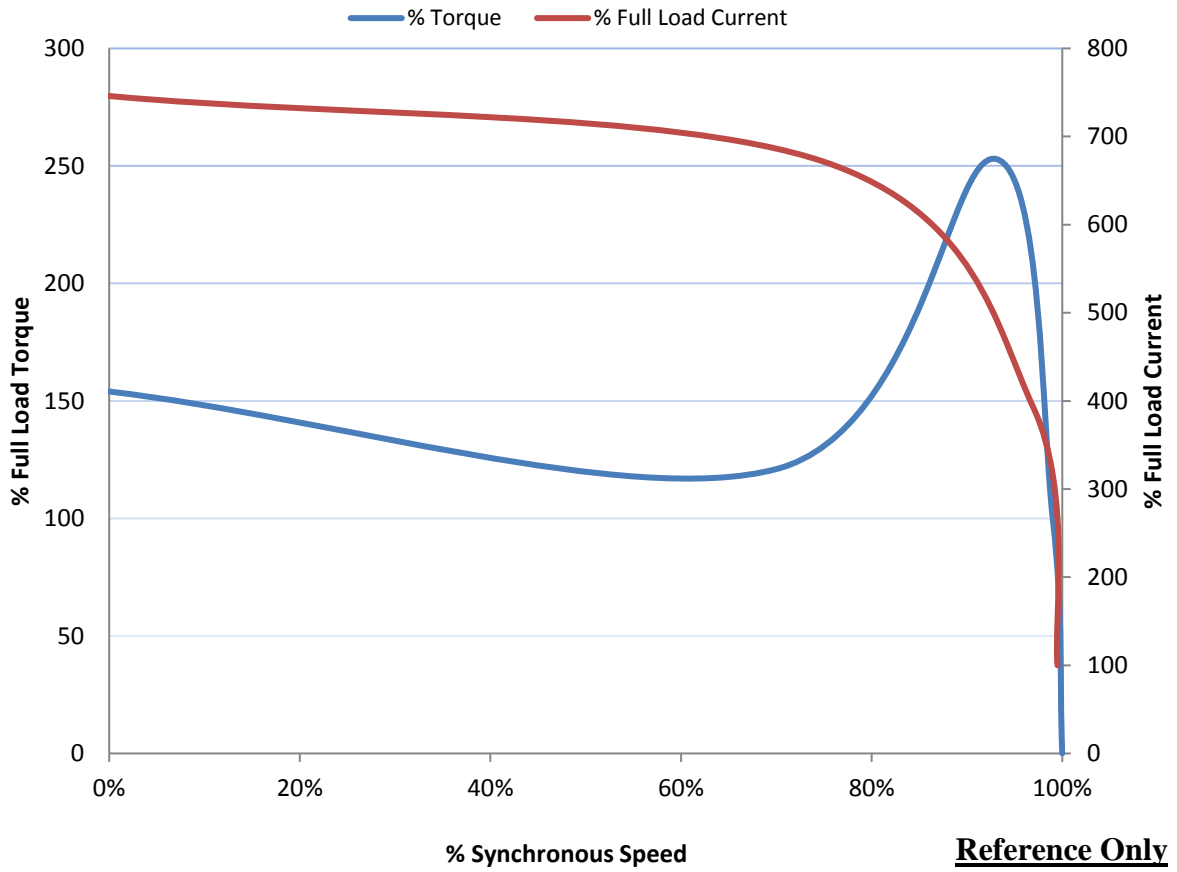