


<b>DATA SHEET ~ TECO MAXe3™ PREMIUM SEVERE DUTY - MEPS HIGH EFFICIENCY</b>	
Type	Squirrel Cage Induction Motor ~ TEFC
Input Supply	415Volts 50Hz 3 Phase
Degree of Protection	IP66 Complete with Porous Drain Plugs
Mounting Arrangments	IM1001 B3 / IM3001 B5 / IM2001 B35
Cooling Class	IC411
Insulation	Class 'F' 155°C
Temperature Rise	≤80°C
Ambient Condition	40°C (TECO can accept up to 55°C ambient as standard)
Altitude	Less than 1000 Metres above sea level
Application	Vee Belt Drive or Direct Coupled
Starting Method	DOL, Soft Starter or VVVF Duty (Subject to load demand)
Service Factor	1.0 p.u @ Class B Temp. rise - 1.15 p.u @ Class F Temp. rise
Rotation	Bi Directional - Low Noise
Bearing Type & Arrangement	Oversize Series Anti Fiction - Ball / Ball Arrangement
Terminal Box Type & Rating	Oversized Cast Iron Construction - IP66 rating
kW Rating	2.2
Pole	6
Full Load Speed (Rpm)	965
Frame Size	112M
Efficiency @ 100% Loading	87.2
Efficiency @ 75% Loading	85.5
Efficiency @ 50% Loading	85.0
Power Factor @ 100% Loading	67.0
Power Factor @ 75% Loading	54.0
Power Factor @ 50% Loading	47.5
Full Load Current (Amps)	5.24
Starting Current in % (DOL)	668
Starting Current (Amps) (DOL)	35.0
Full Load Torque (Nm)	21.70
Locked Rotor Torque (DOL) (% of Full Load Torque)	220
Pull Up Torque (DOL) (% of Full Load Torque)	198
Breakdown Torque (% of Full Load Torque)	314
Rotor Inertia in GD <sup>2</sup> /4 (kG-M <sup>2</sup> )	0.0210
Maximum Inertia in GD <sup>2</sup> /4 (kG-M <sup>2</sup> )	2.6800
Noise Pressure Level @ 1 Metre No Load (dBA)	48
Approx. Weight (kG)	50

### DOL Torque versus Speed & Current Curve



### Efficiency & Power Factor Load Curve

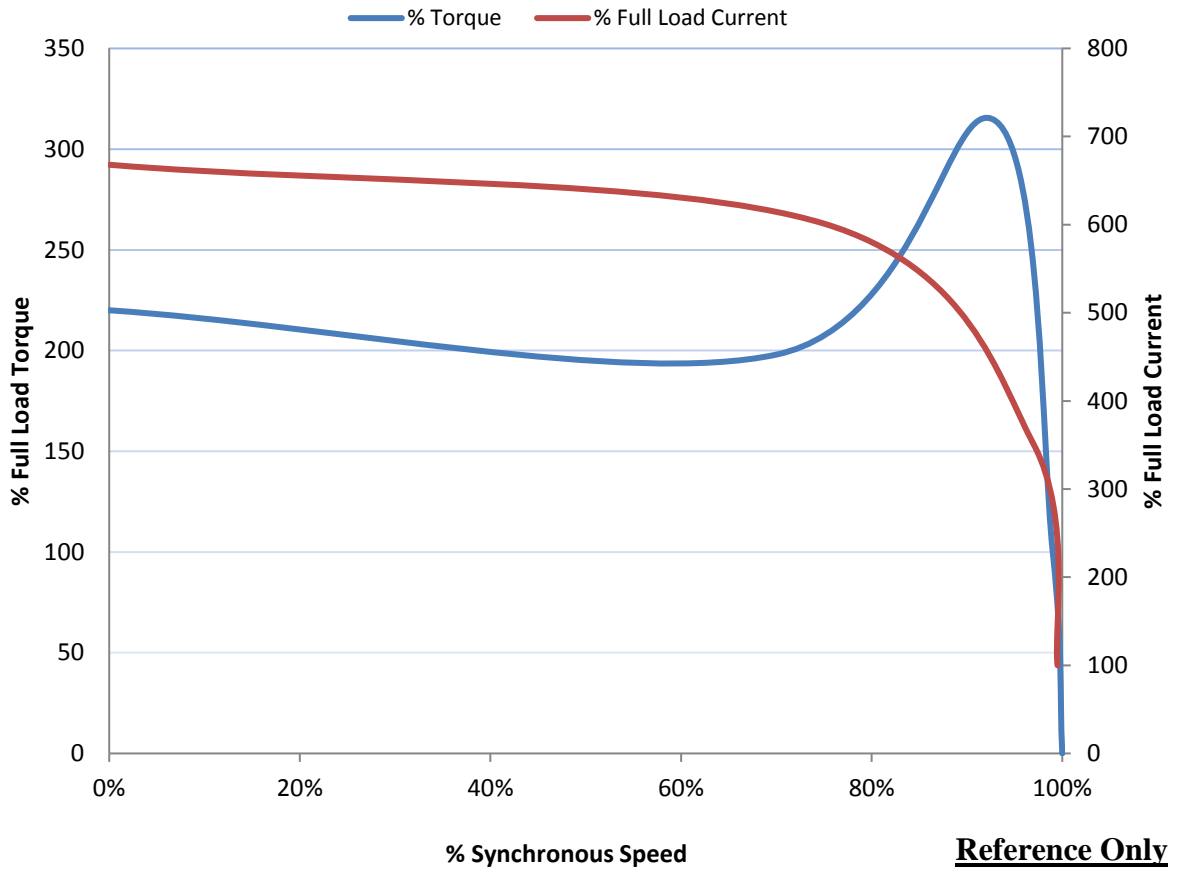