




OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR

FRAME NO :

D160M

| POLES | KW | HP | SYNCH RPM |
|-------|-------|---------|-----------|
| 2 | 11/15 | 15/20 | 3000 |
| 4 | 11 | 15 | 1500 |
| 6 | 7.5 | 10 | 1000 |
| 8 | 4/5.5 | 5.5/7.5 | 750 |
| | | | |

Totally Enclosed Fan-Cooled Type, Squirrel-Cage Rotor.

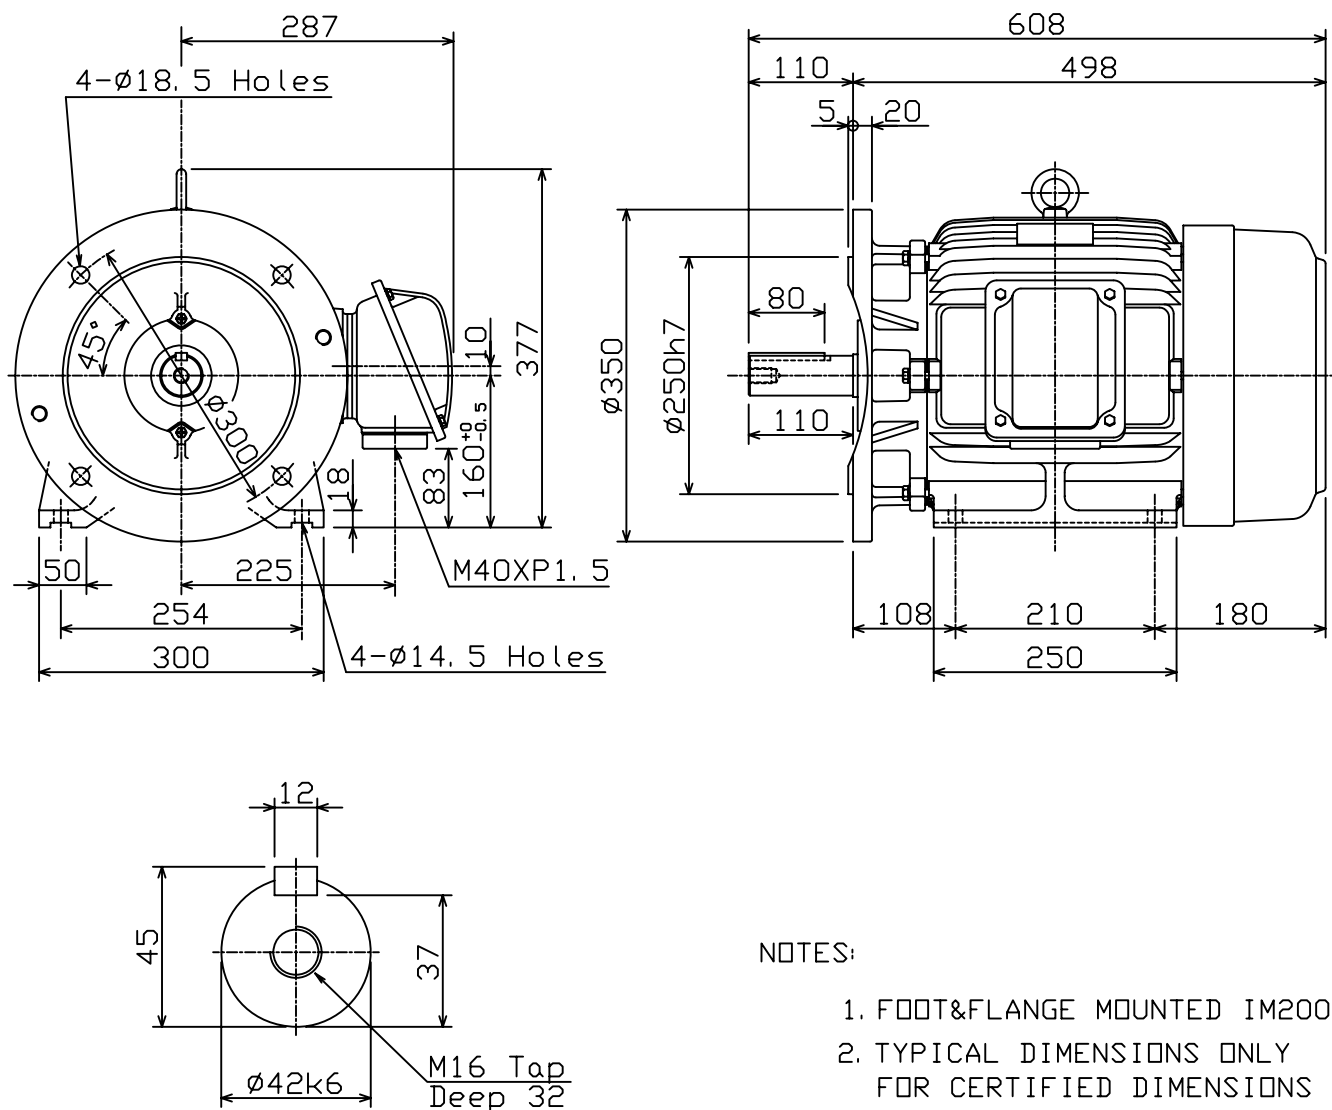

NOTES:

1. FOOT&FLANGE MOUNTED IM2001.
2. TYPICAL DIMENSIONS ONLY FOR CERTIFIED DIMENSIONS REFER TO TECO.
3. FOR BELT OR DIRECT DRIVE.

FOR MAXe3MINING AND
AND MAXe3PREMIUM SEVERE DUTY

| | | |
|-------|----|------------|
| DWN. | EJ | 01. 12. 15 |
| CHKD. | DK | 01. 12. 15 |
| APPD. | JF | 01. 12. 15 |

東元電機股份有限公司
TECO ELEC. & MACH. CO., LTD.
TAIWAN R. O. C.

REV : 00