


Type	:	AFJE Mining Series TEFC Squirrel Cage Induction Cast Iron Frame			
Input Supply	:	3 Phase , 415 V, 50 Hz			
Degree of Protection	:	IP66			
Mounting Arrangement	:	IM 1001			
Cooling Class	:	IC411			
Insulation / Temperature Rise	:	Class H / $\leq 80^{\circ}\text{C}$			
Ambient Condition	:	40 $^{\circ}\text{C}$			
Altitude	:	$\leq 1000$ Metres above sea level			
Application	:	Belt			
Starting Method	:	DOL			
Service Factor	:	1.20 at Class B rise			
Rotation	:	Bi-Directional			
Bearing Grease Lubrication	:	Grease relief anti-friction			
Bearing Type	:	DE:	NU326C3	NDE:	6320C3
Terminal Box Type	:	Oversized Fabricated Steel			
kW Rating	:	375			
Pole	:	4			
Full Load Speed (Rpm)	:	1492			
Frame Size	:	D315DC			
Efficiency	@ 100% Loading	:	96.2		
	@ 75% Loading	:	95.8		
	@ 50% Loading	:	95.2		
Power Factor	@ 100% Loading	:	87.5		
	@ 75% Loading	:	83.9		
	@ 50% Loading	:	74.8		
Full Load Current (A)	:	620			
Starting Current in %	:	743			
Starting Current (A)	:	4602			
Lock Rotor Torque (% of FLT)	:	205			
Pull-up Torque (% of FLT)	:	174			
Breakdown Torque (% of FLT)	:	230			
Full Load Torque (Nm)	:	2400			
Safe Stall Time	Hot (s)	:	17		
	Cold (s)	:	21		
Rotor Inertia in $J = GD^2/4$ (kg.m <sup>2</sup> )	:	35			
Max. Load Inertia in $J = GD^2/4$ (kg.m <sup>2</sup> )	:	748			
Approx. Weight (kG)	:	2250			

### Torque Speed Current Curve



### Efficiency & Power Factor Load Curve

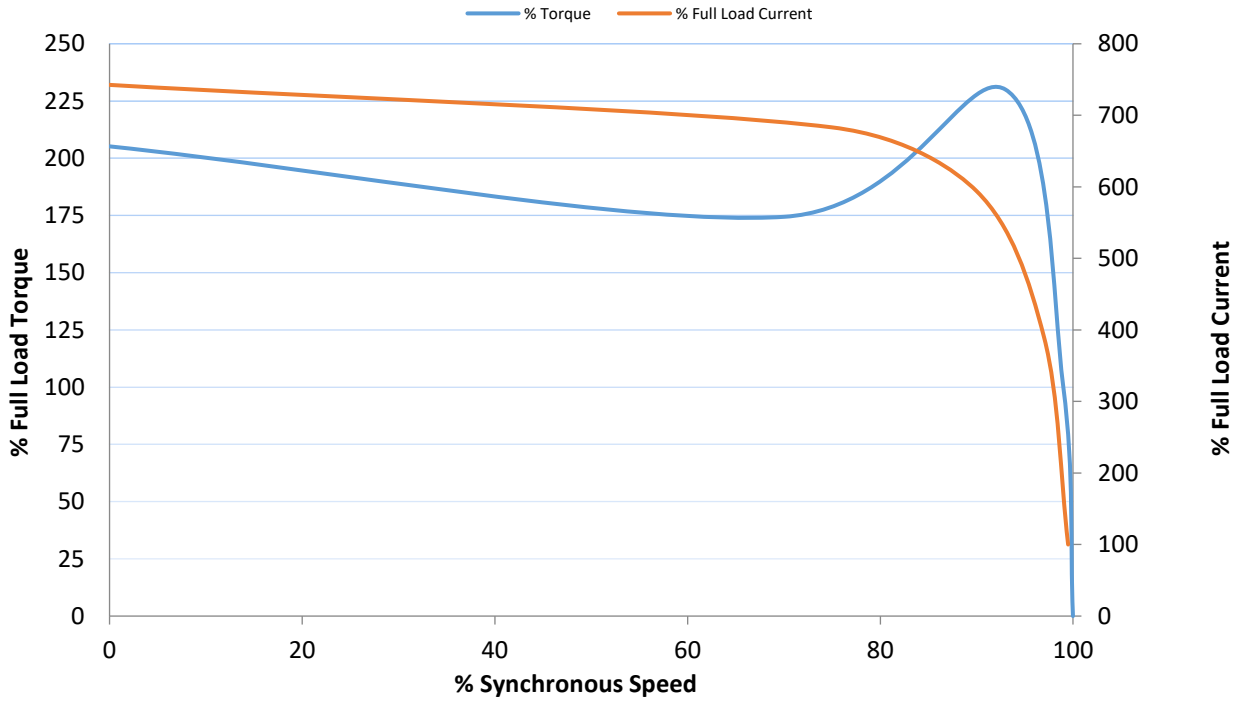