


<b>DATA SHEET ~ TECO MAXe3™ PREMIUM SEVERE DUTY - MEPS HIGH EFFICIENCY</b>	
Type	Squirrel Cage Induction Motor ~ TEFC
Input Supply	415Volts 50Hz 3 Phase
Degree of Protection	IP66 Complete with Porous Drain Plugs
Mounting Arrangments	IM1001 B3 / IM3001 B5 / IM2001 B35
Cooling Class	IC411
Insulation	Class 'F' 155°C
Temperature Rise	≤80°C
Ambient Condition	40°C (TECO can accept up to 55°C ambient as standard)
Altitude	Less than 1000 Metres above sea level
Application	Vee Belt Drive or Direct Coupled
Starting Method	DOL, Soft Starter or VVVF Duty (Subject to load demand)
Service Factor	1.0 p.u @ Class B Temp. rise - 1.15 p.u @ Class F Temp. rise
Rotation	Bi Directional - Low Noise
Bearing Type & Arrangement	Oversize Series Anti Fiction - Ball / Ball Arrangement
Terminal Box Type & Rating	Oversized Cast Iron Construction - IP66 rating
kW Rating	1.1
Pole	8
Full Load Speed (Rpm)	695
Frame Size	100L
Efficiency @ 100% Loading	79.5
Efficiency @ 75% Loading	80.0
Efficiency @ 50% Loading	77.5
Power Factor @ 100% Loading	64.0
Power Factor @ 75% Loading	55.0
Power Factor @ 50% Loading	42.5
Full Load Current (Amps)	3.01
Starting Current in % (DOL)	498
Starting Current (Amps) (DOL)	15.0
Full Load Torque (Nm)	15.10
Locked Rotor Torque (DOL) (% of Full Load Torque)	231
Pull Up Torque (DOL) (% of Full Load Torque)	220
Breakdown Torque (% of Full Load Torque)	237
Rotor Inertia in GD <sup>2</sup> /4 (kG-M <sup>2</sup> )	0.0148
Maximum Inertia in GD <sup>2</sup> /4 (kG-M <sup>2</sup> )	2.7400
Noise Pressure Level @ 1 Metre No Load (dBA)	49
Approx. Weight (kG)	39

### DOL Torque versus Speed & Current Curve



### Efficiency & Power Factor Load Curve

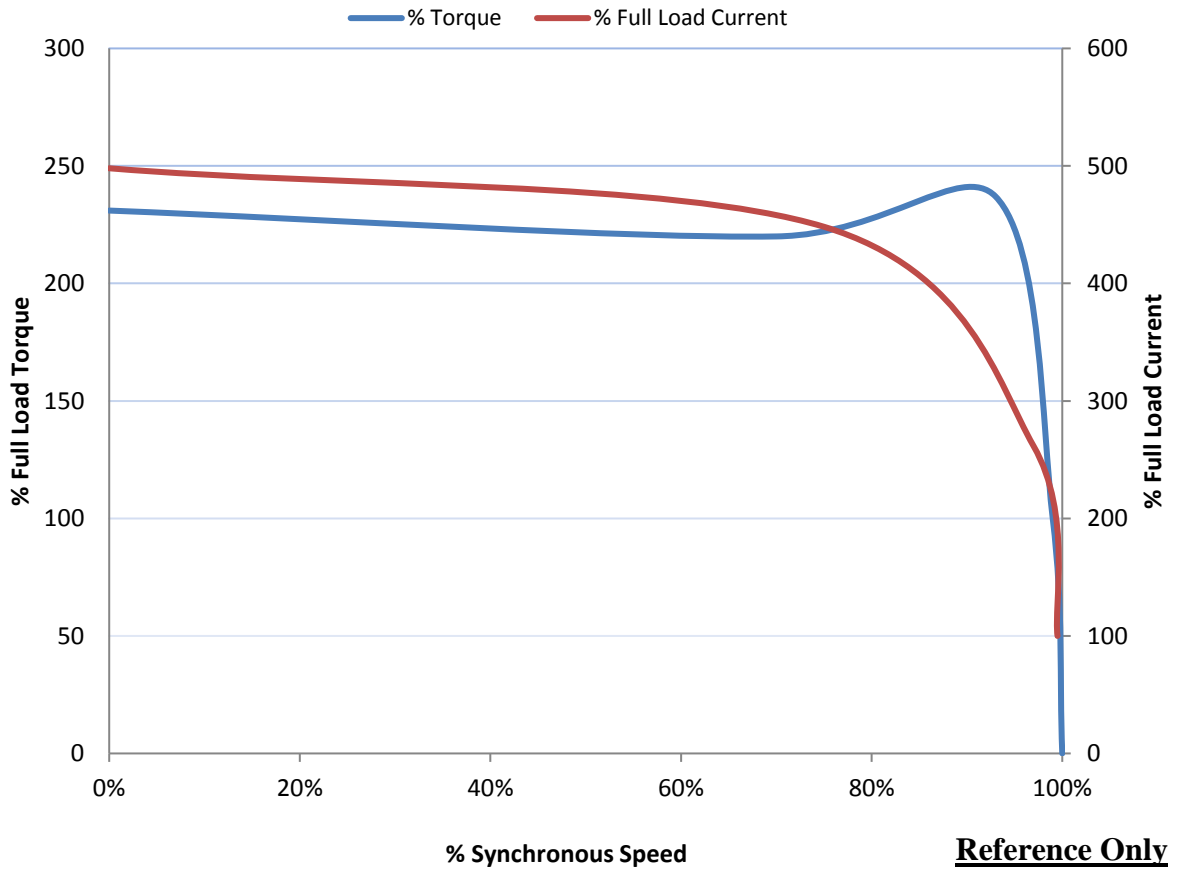